

GOLD LABEL™

Dayco's **GOLD LABEL** offers a complete range of **Raw Edge** V-Belts (Classical, Metric and Narrow-Wedge).




Gold Label raw edge belts are recommended for all Industrial applications (textile mills, fan, lathes, grinding machine, compressors, pumps), in particular where temperature and power capacity are critical. They are specially designed for OEMs.

Designed for **OEMs**

DAYCO®

MOVE FORWARD. ALWAYS.™

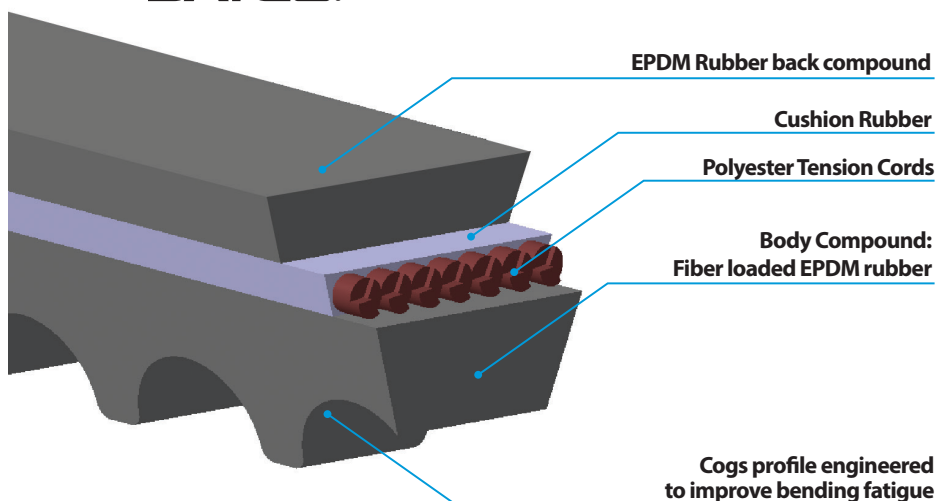


Technical characteristics:

- REACH & Prop65 compliant
- Good abrasion resistance
- Good Ozone resistance
- High Coefficient of friction (increased Power capacity vs. wrapped belt)
- Very good Heat resistance
- Temperature Range: -50°C to +140°C
- Static conductive ISO1813
- Designed for OEMs

Gold Label Range

Classical: "V" Belts:

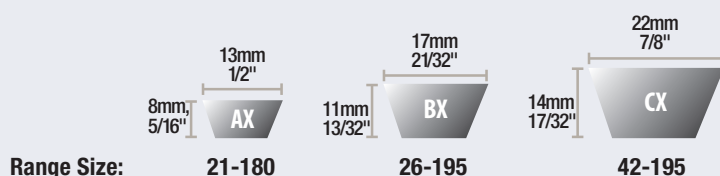

Part Number Description

AX25GL
AX Profile: 1/2" x 5/16"
25: 25" Internal Length
GL: GOLD LABEL


Part Number Description

XPA1000GL
XPA Profile: 13mm x 10mm
1000: 1000mm Datum Length
GL: GOLD LABEL


Part Number Description

5VX2000GL
5VX Profile: 5/8" x 17/32"
2000: 200" Outside Length
GL: GOLD LABEL

Metric: "SP" Wedge Belts:

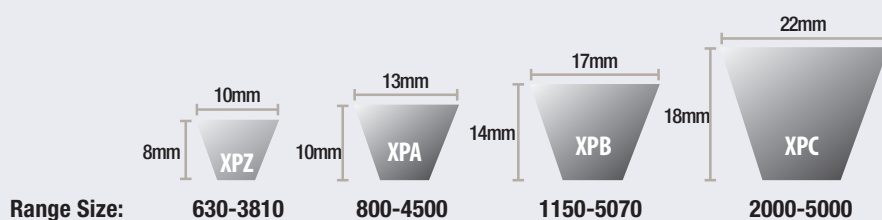

Narrow: "V" Wedge Belts:

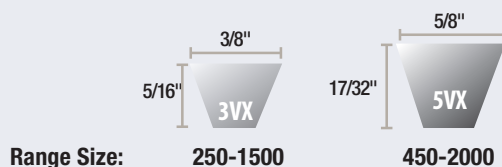

GOLD LABEL raw edge belts are manufactured with Restricted Length Tolerance (RLT) for set matching.

GOLD LABEL™